



# LG 1010 Front Cover Replacement

How to replace the front and back case in the LG 1010 cellular phone.

Written By: Nicholas Schmidt





## TOOLS:

- Flathead 3/32" or 2.5 mm Screwdriver (1)
  - Spudger (1)
  - T6 Torx Screwdriver (1)
-

## Step 1 — Front Cover



- Use a Spudger to remove the two front plastic covers to reveal screws.


## Step 2



- Remove two screws using a Torx T6 screwdriver.



## Step 3

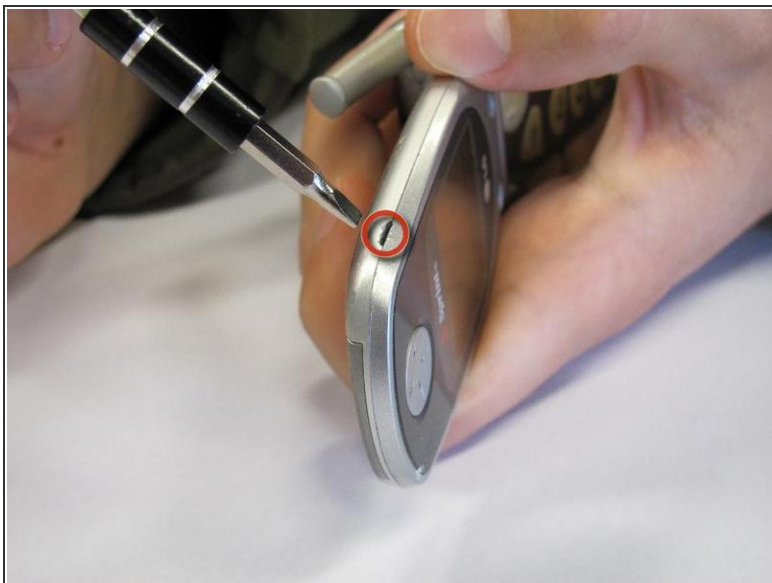


- Pry off screen front cover with a Small Flathead Screwdriver.

## Step 4



- Insert Small Flathead Screwdriver into the hinge and separate hinge connection.

## Step 5

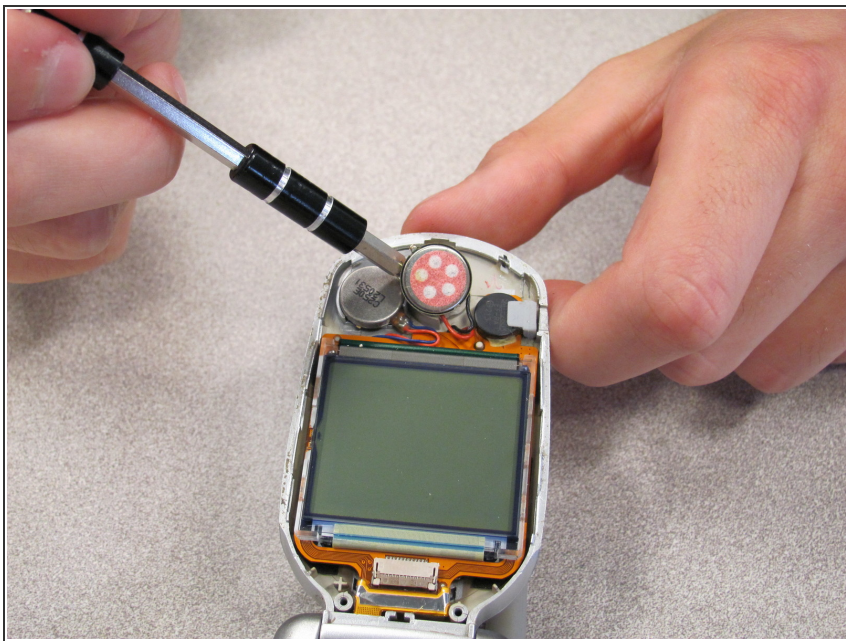

- Pry off the speaker which is glued on to the front cover using a Small Flathead Screwdriver.

## Step 6



- Remove remaining portion of the front case from the flexible circuit board.
- ⚠ Do not attempt to remove the LCD board at this time, as it is attached to the rear panel assembly.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-19 07:37:52 AM.